




IT 5980



7,80 m



IT 7380

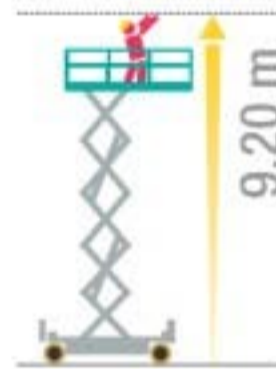

9,20 m

12,00 m  
16,00 m

IT 4

IT 7

		IT 4680	IT 5980	IT 7380
Number of scissors		3	4	5
A	mm	4500	5800	7200
B	mm	6500	7800	9200
C (Pot-hole raised/lowered)	mm		88 / 21	
D	mm	1983	2087	2190
E	mm	858	961	1065
F	mm	1553	1657	1760
Capacity (including 2 people)	kg	270	230	200
Electric drive motors	V/kW		24 / 2,4	
Lifting power pack – hydraulic type	V/kW		24 / 2,1	
Traction battery	V/Ah		24/195 c5	
Battery weight	kg		4x30	
Battery charger	V/A		24 / 30	
Oil tank capacity	l		7	
Traction speed	km/h		0 ÷ 4	
Safety traction speed	km/h		0,6	
Gradeability	%		25	
Internal steering radius	m		0	
External steering radius	m		1,65	
Tyre dimensions	mm		315x100	
Tyre type			cushion	
Max side/longitudinal tilt angle	degrees	2 / 3	2 / 3	1,5 / 3
Total weight	kg	1265	1530	1780

